


TEHNIČKI LIST

# PERFORANI LIM

# W-ZVID

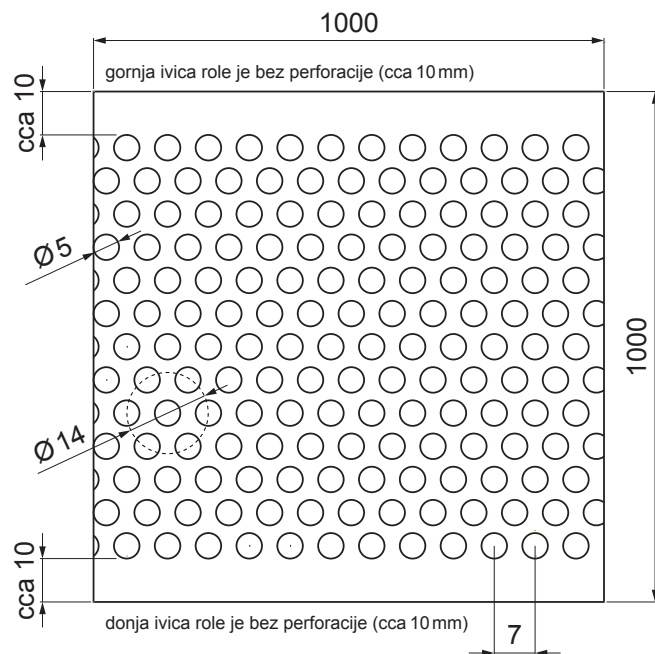

**1 m<sup>2</sup> = 1 tm**  
 na 1 m<sup>2</sup> je 46 % otpada  
 (46 % je površina perforacije)



**BHM BH** Aluminijum obojeni: Silver W.15 – RAL 9006 / Silver – RAL 9006

INDEKS	SMENA	DATUM	POTPIS			
MARKA MAT.		K.O.	TEŽINA kg			
DIM.–POLUPROIZVOD						
PROPORCIJE UREĐAJA.			STN	BROJ KAT.		
IZRADIO	Ing. Kluska M.		BELEŠKA	BR.POZICIJE		
PROVERIO						
TEHNOL.	TEHNOL.		STARI CRTEŽ	BR.CRTEŽA		
NAZIV			Perforani lim		Broj listova	W-ZVID List

Kreirano: 22.04.2026 18:29:47

Tehničke promene moguće