


TEHNIČKI LIST

# PERFORANI LIM 100 mm/5 mm/30 m



## W-ZVID 30/10

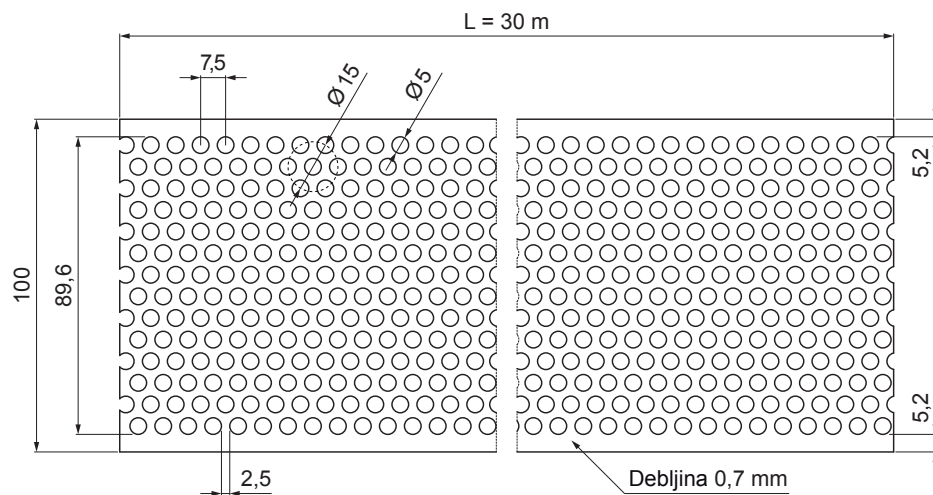

(32,7% je površina perforacije)



**UPOTREBA:**

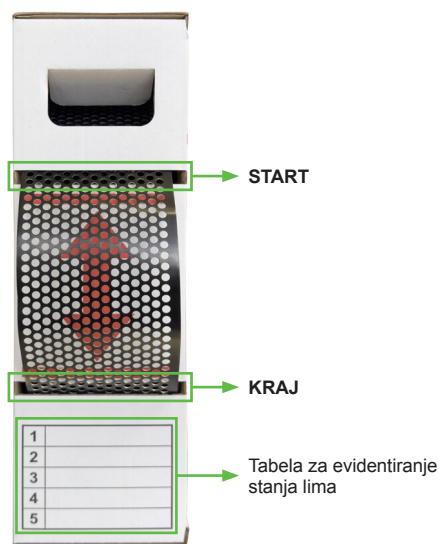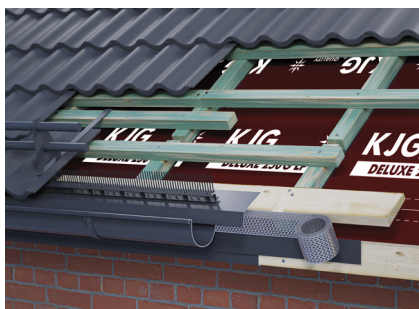

**ICM IC** Aluminijum obojeni: Intenzivno crna W.15 – RAL 9005 / Intenzivno crna – RAL 9005

|                        |                                |       |              |   |
|------------------------|--------------------------------|-------|--------------|---|
| INDEKS                 | SMENA                          | DATUM | POTPIS       |   |
| MARKA MAT.             |                                |       |              |   |
| DIM.-POLUPROIZVOD      |                                | K.O.  | TEŽINA kg    | RAZMERE   |
| PROPORCIJE UREĐAJA.    |                                |       | STN          | BROJ KAT.   |
| IZRADIO Ing. Kluska M. |                                |       | BELEŠKA      | BR.POZICIJE   |
| PROVERIO               |                                |       | STARI CRTEŽ  | BR.CRTEŽA   |
| TEHNOL.                | TEHNOL.                        |       | STARI CRTEŽ  | BR.CRTEŽA   |
| NAZIV                  | Perforani lim 100 mm/5 mm/30 m |       | Broj listova | W-ZVID 30/10  |
|                        |                                |       |              | List  |

Kreirano: 20.04.2026 11:15:41

Tehničke promene moguće